


Qty. Description

1 **CONLIFT1**



Note! Product picture may differ from actual product

Product No.: [97936156](#)

Conlift1

Applications

The Conlift1 is suitable for the pumping of condensate which is collected below sewer level or which cannot flow to the sewage system or drain of the building by means of a natural downward slope.

Typical applications:

- Condensate boilers.
- For condensate with a pH value above 2.5.
- For condensate from air-conditioning systems, cooling and refrigeration systems, air dehumidifiers and evaporators.
- For condensate with a pH value below 2.5, use Conlift2 pH+.

Features

- Fully sealed against moisture and evaporation.
- Quick and easy installation.
- Very silent and smooth operation.
- Can be mounted on the floor or on a wall.
- Pre-assembled non-return valve.
- Pump operation test button.
- Incorporates high-water float switch.
- Fully automatic operation.
- Inlet and discharge hose connectors included.

Liquid:

Maximum liquid temperature: 50 °C
Density: 998.2 kg/m³

Technical:

Approvals on nameplate: VDE, GOST

Installation:

Pump inlet: 18-30
Pump outlet: 8-10

Electrical data:

Power input - P1: 75 W
Mains frequency: 50 Hz
Rated voltage: 1 x 230 V
Rated current: 0.65 A
Enclosure class (IEC 34-5): IP24
Insulation class (IEC 85): F
Length of cable: 1.7 m
Type of cable plug: SCHUKO

Tank:


Total volume of tank(s): 2.65 l

Others:

Net weight: 4.1 kg
Danish VVS No.: 385651100

Qty.	Description				
	<table><tr><td data-bbox="193 152 542 190">Finnish LVI No.:</td><td data-bbox="542 152 1489 190">4965326</td></tr><tr><td data-bbox="193 190 542 228">Norwegian NRF no.:</td><td data-bbox="542 190 1489 228">9045396</td></tr></table>	Finnish LVI No.:	4965326	Norwegian NRF no.:	9045396
Finnish LVI No.:	4965326				
Norwegian NRF no.:	9045396				




97936156 CONLIFT1 50 Hz

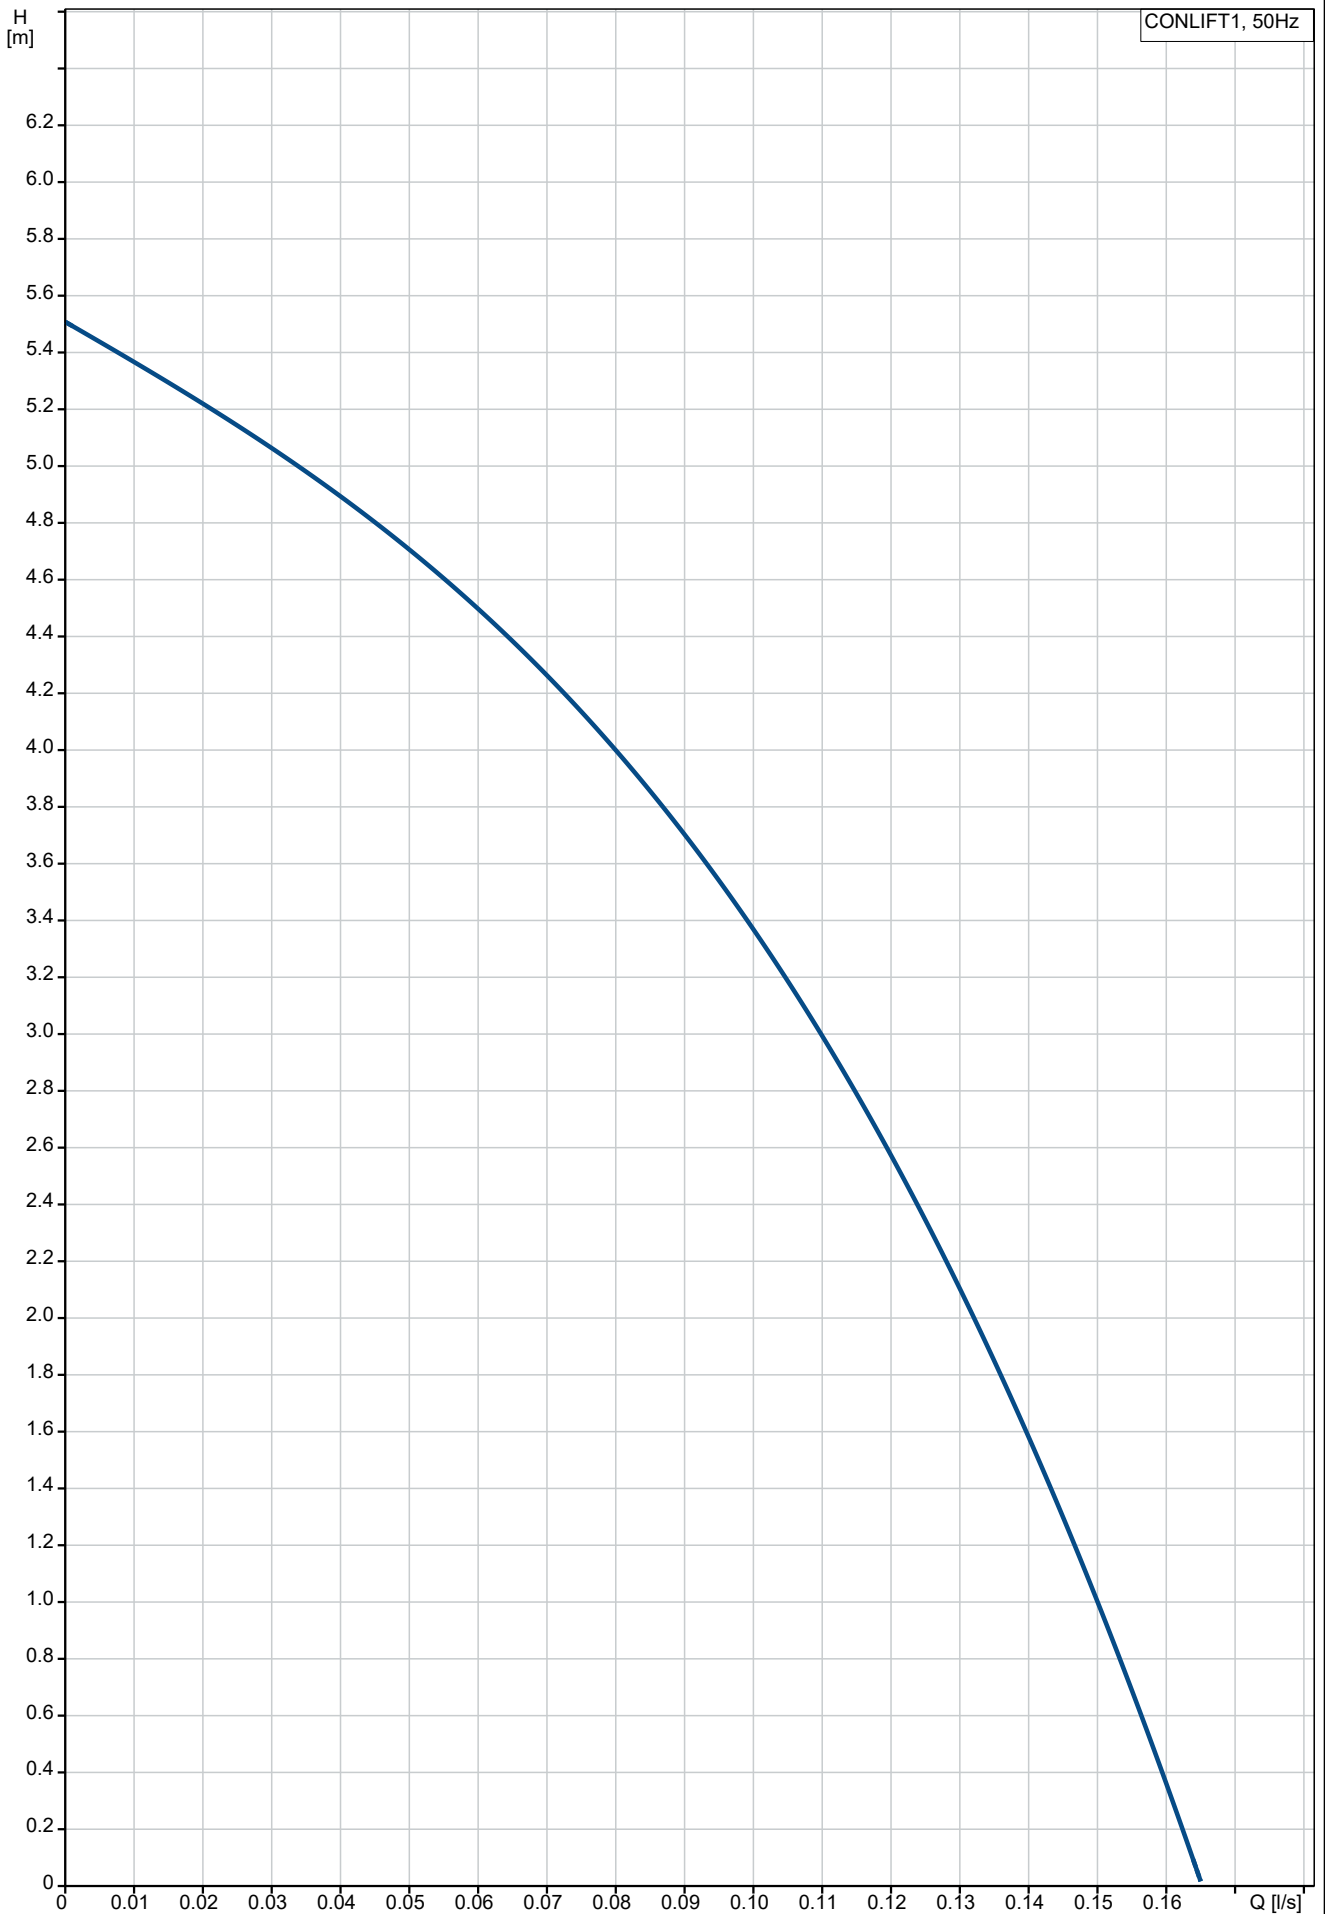

Description	Value
General information:	
Product name:	CONLIFT1
Product No:	97936156
EAN number:	5710626733828
Price:	
Technical:	
Maximum flow:	0.167 l/s
Max flow:	0.167 l/s
Head max:	5.5 m
Approvals on nameplate:	VDE, GOST
Installation:	
Pump inlet:	18-30
Pump outlet:	8-10
Liquid:	
Maximum liquid temperature:	50 °C
Density:	998.2 kg/m ³
Min. pH-value:	2.7
Electrical data:	
Power input - P1:	75 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	0.65 A
Enclosure class (IEC 34-5):	IP24
Insulation class (IEC 85):	F
Length of cable:	1.7 m
Type of cable plug:	SCHUKO
Mains cable:	H05W-F36
Tank:	
Total volume of tank(s):	2.65 l
Others:	
Net weight:	4.1 kg
Danish VVS No.:	385651100
Finnish LVI No.:	4965326
Norwegian NRF no.:	9045396




97936156 CONLIFT1 50 Hz

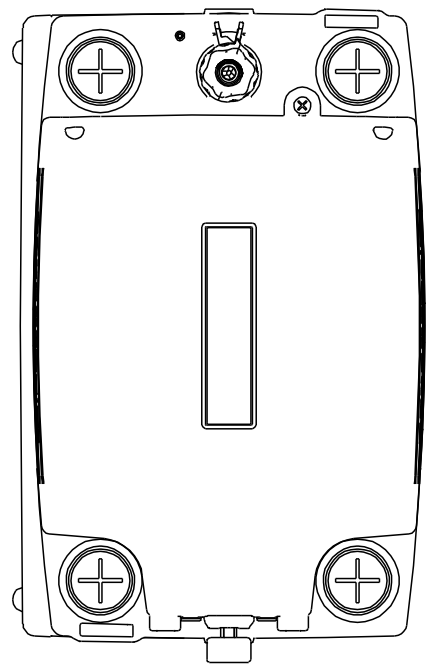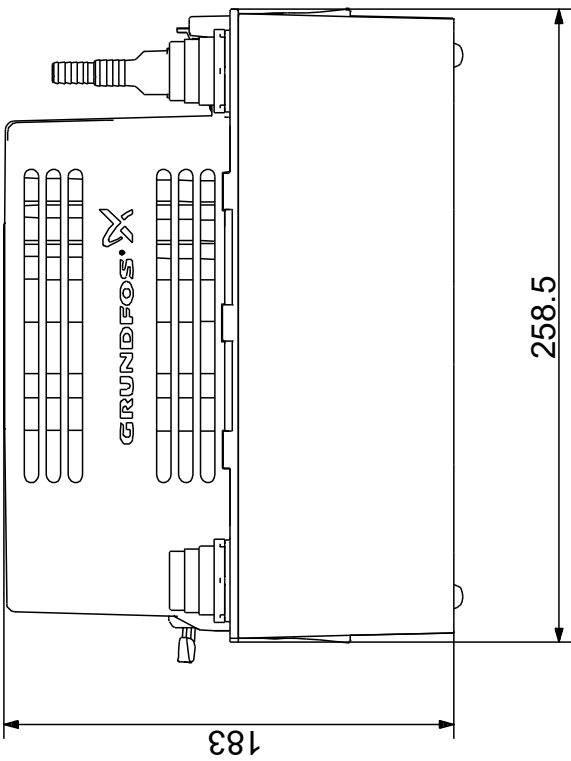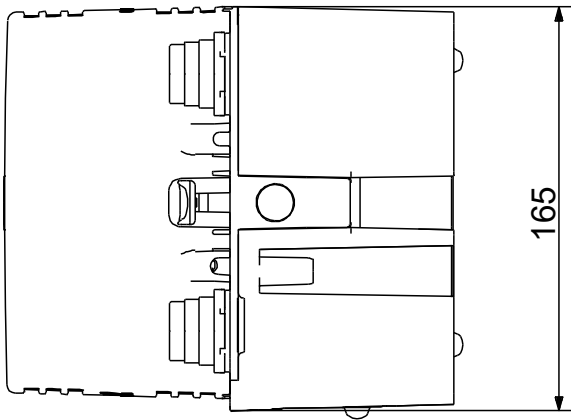

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

97936156 CONLIFT1 50 Hz

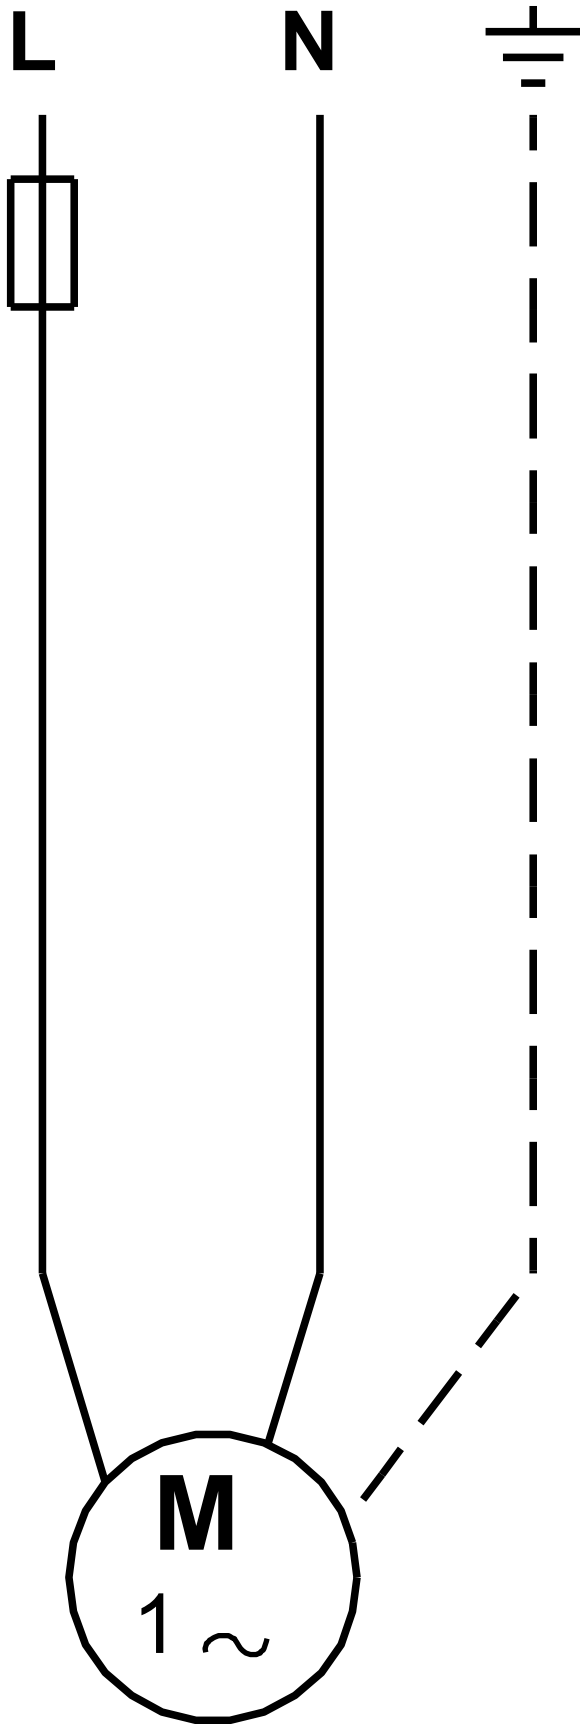

Note! All units are in [mm] unless others are stated.