



Qty.	Description
1	<p data-bbox="193 152 399 190"><b>Unilift CC7 - AG1</b></p> <div data-bbox="236 226 544 696">  </div> <p data-bbox="592 705 1064 730">Note! Product picture may differ from actual product</p> <p data-bbox="193 734 464 763">Product No.: <a href="#">98624463</a></p> <p data-bbox="193 824 1437 853">Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.</p> <p data-bbox="193 913 1050 943">The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul data-bbox="193 945 1142 1093" style="list-style-type: none"> <li>• washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level</li> <li>• cellars or buildings prone to flooding</li> <li>• draining wells</li> <li>• wells for surface water with inlets from roof gutters, pits, tunnels, etc.</li> <li>• swimming pools, ponds or fountains.</li> </ul> <p data-bbox="193 1122 847 1151">The pumps are suitable for both stationary and portable use.</p> <p data-bbox="193 1153 1390 1205">They are for automatic operation equipped with a guided float switch on a lever arm for narrow tanks and pump sumps.</p> <p data-bbox="193 1209 818 1238">The pumps allow free passage of particles up to <math>\varnothing 10</math> mm.</p> <p data-bbox="193 1267 1219 1328">The motor incorporates automatic overload protection cutting out the motor in case of overload. When cooled to normal temperature, the motor restarts automatically.</p>


98624463 Unilift CC7 - AG1 50 Hz

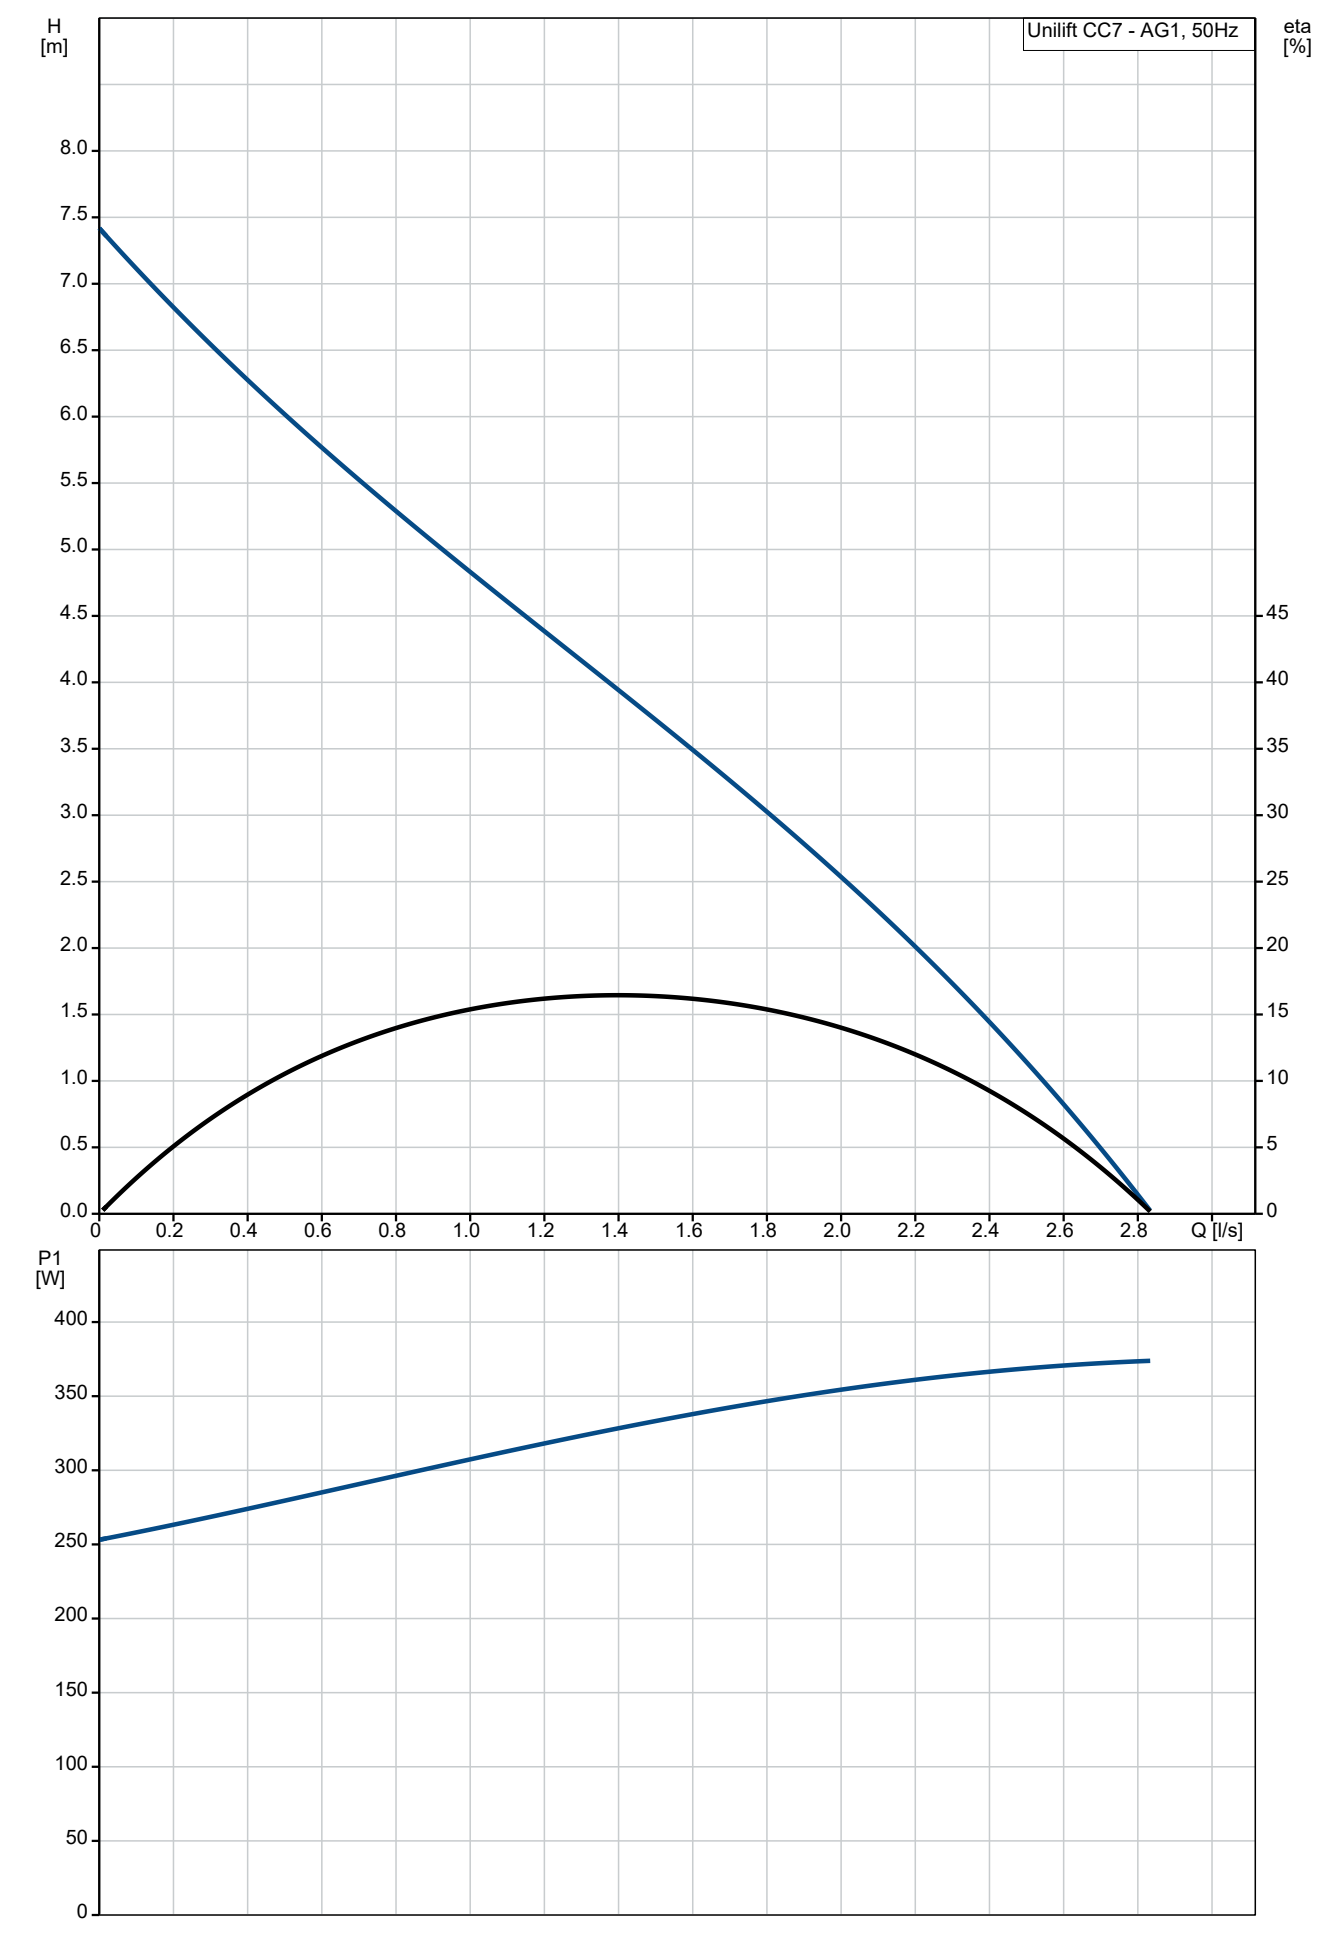

Description	Value
<b>General information:</b>	
Product name:	Unilift CC7 - AG1
Product No:	98624463
EAN number:	5711498431317
Price:	
<b>Technical:</b>	
Rated flow:	1.4 l/s
Maximum flow:	2.78 l/s
Rated head:	3.95 m
Maximum head:	7 m
Max. Particle:	10 mm
Approvals:	CE,LGA,VDE,GS,EMV,GOST
Rated driver speed:	2850 rpm
<b>Materials:</b>	
Pump housing:	Polypropylene
Pump housing:	PP - GF15
Impeller:	PPOm 20 GF
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Motor:	Stainless steel
Motor:	EN 1.4301
Motor:	AISI 304
<b>Installation:</b>	
Type of connection:	G
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
<b>Liquid:</b>	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m³
<b>Electrical data:</b>	
Length of power cable:	10 m
Power input P1:	380 W
P2:	171 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	1.8 A
Capacitor size - run:	8 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	YES
Type of cable plug:	SCHUKO
<b>Controls:</b>	
Level switch:	A
<b>Others:</b>	
Net weight:	5.42 kg
Gross weight:	6.18 kg
Shipping volume:	0.017 m³
Danish VVS No.:	391280372
Swedish RSK No.:	5886000
Finnish LVI No.:	4822528

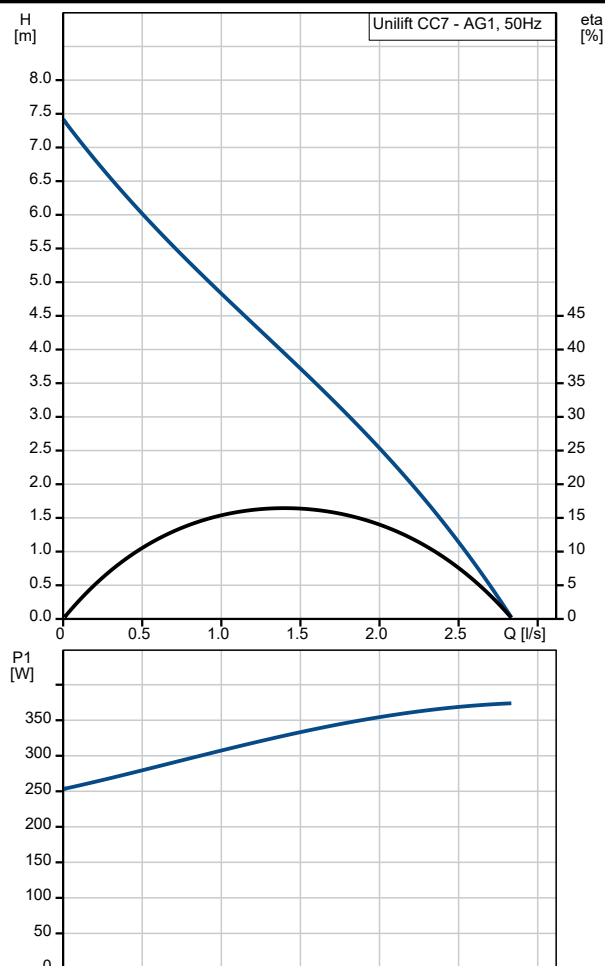


## 98624463 Unilift CC7 - AG1 50 Hz

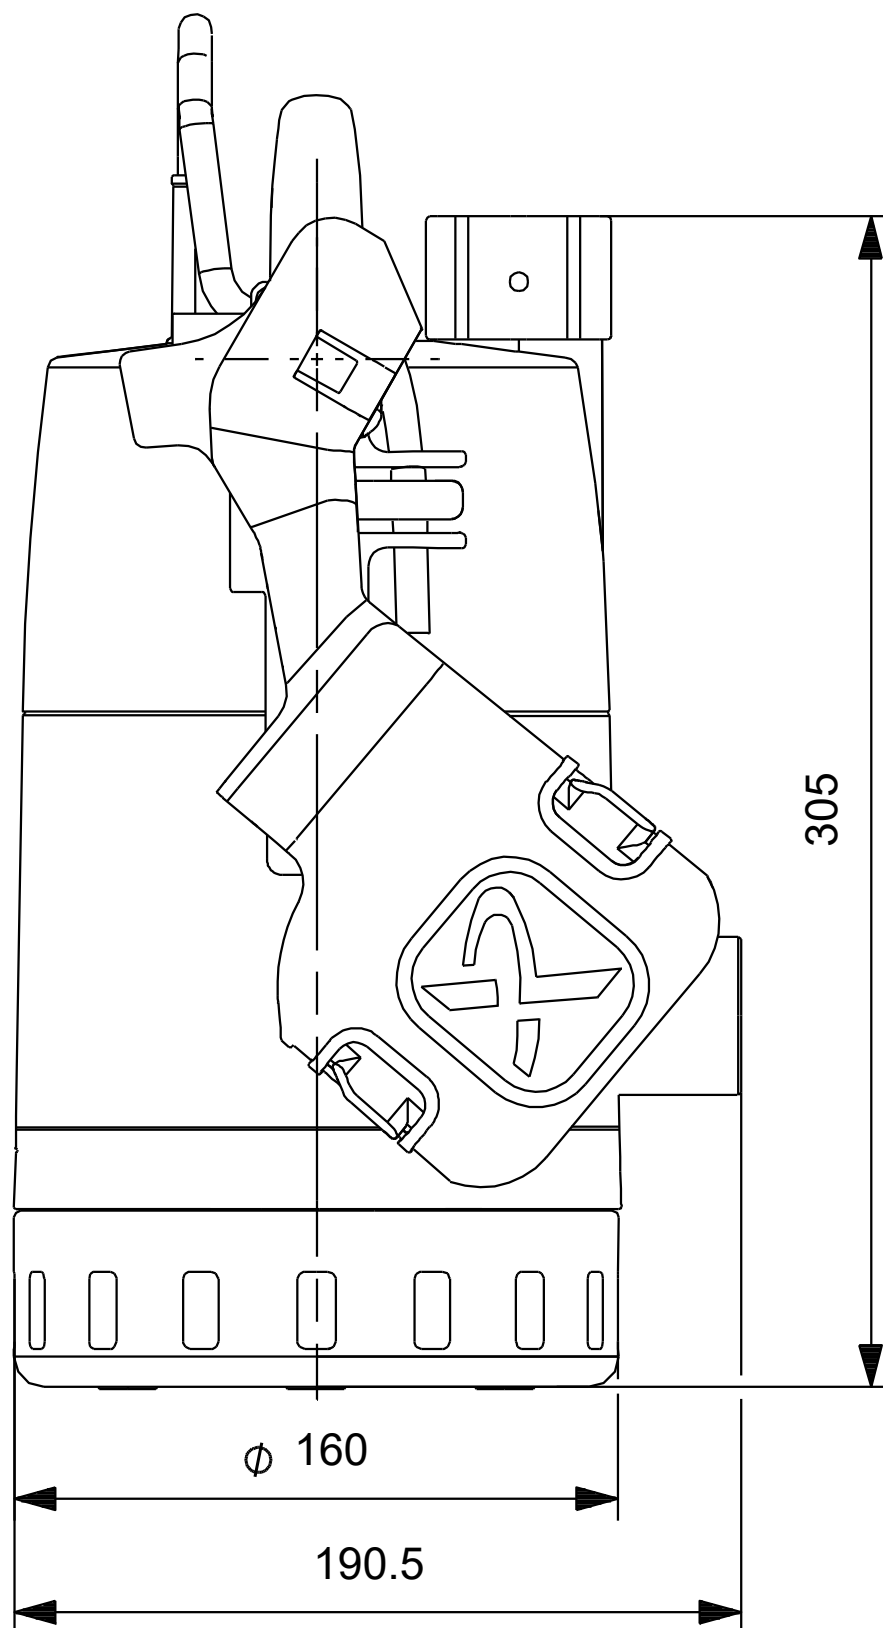

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

# 98624463 Unilift CC7 - AG1 50 Hz

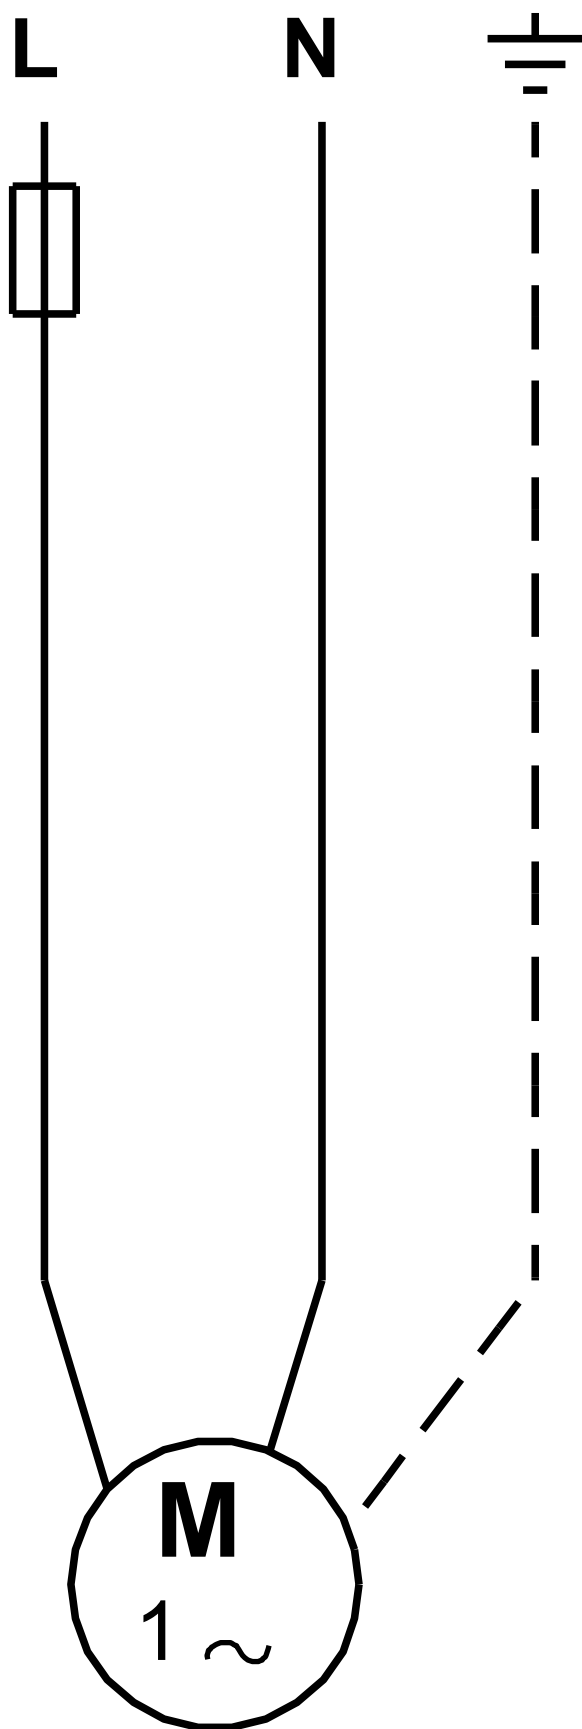

Note! All units are in [mm] unless others are stated.