
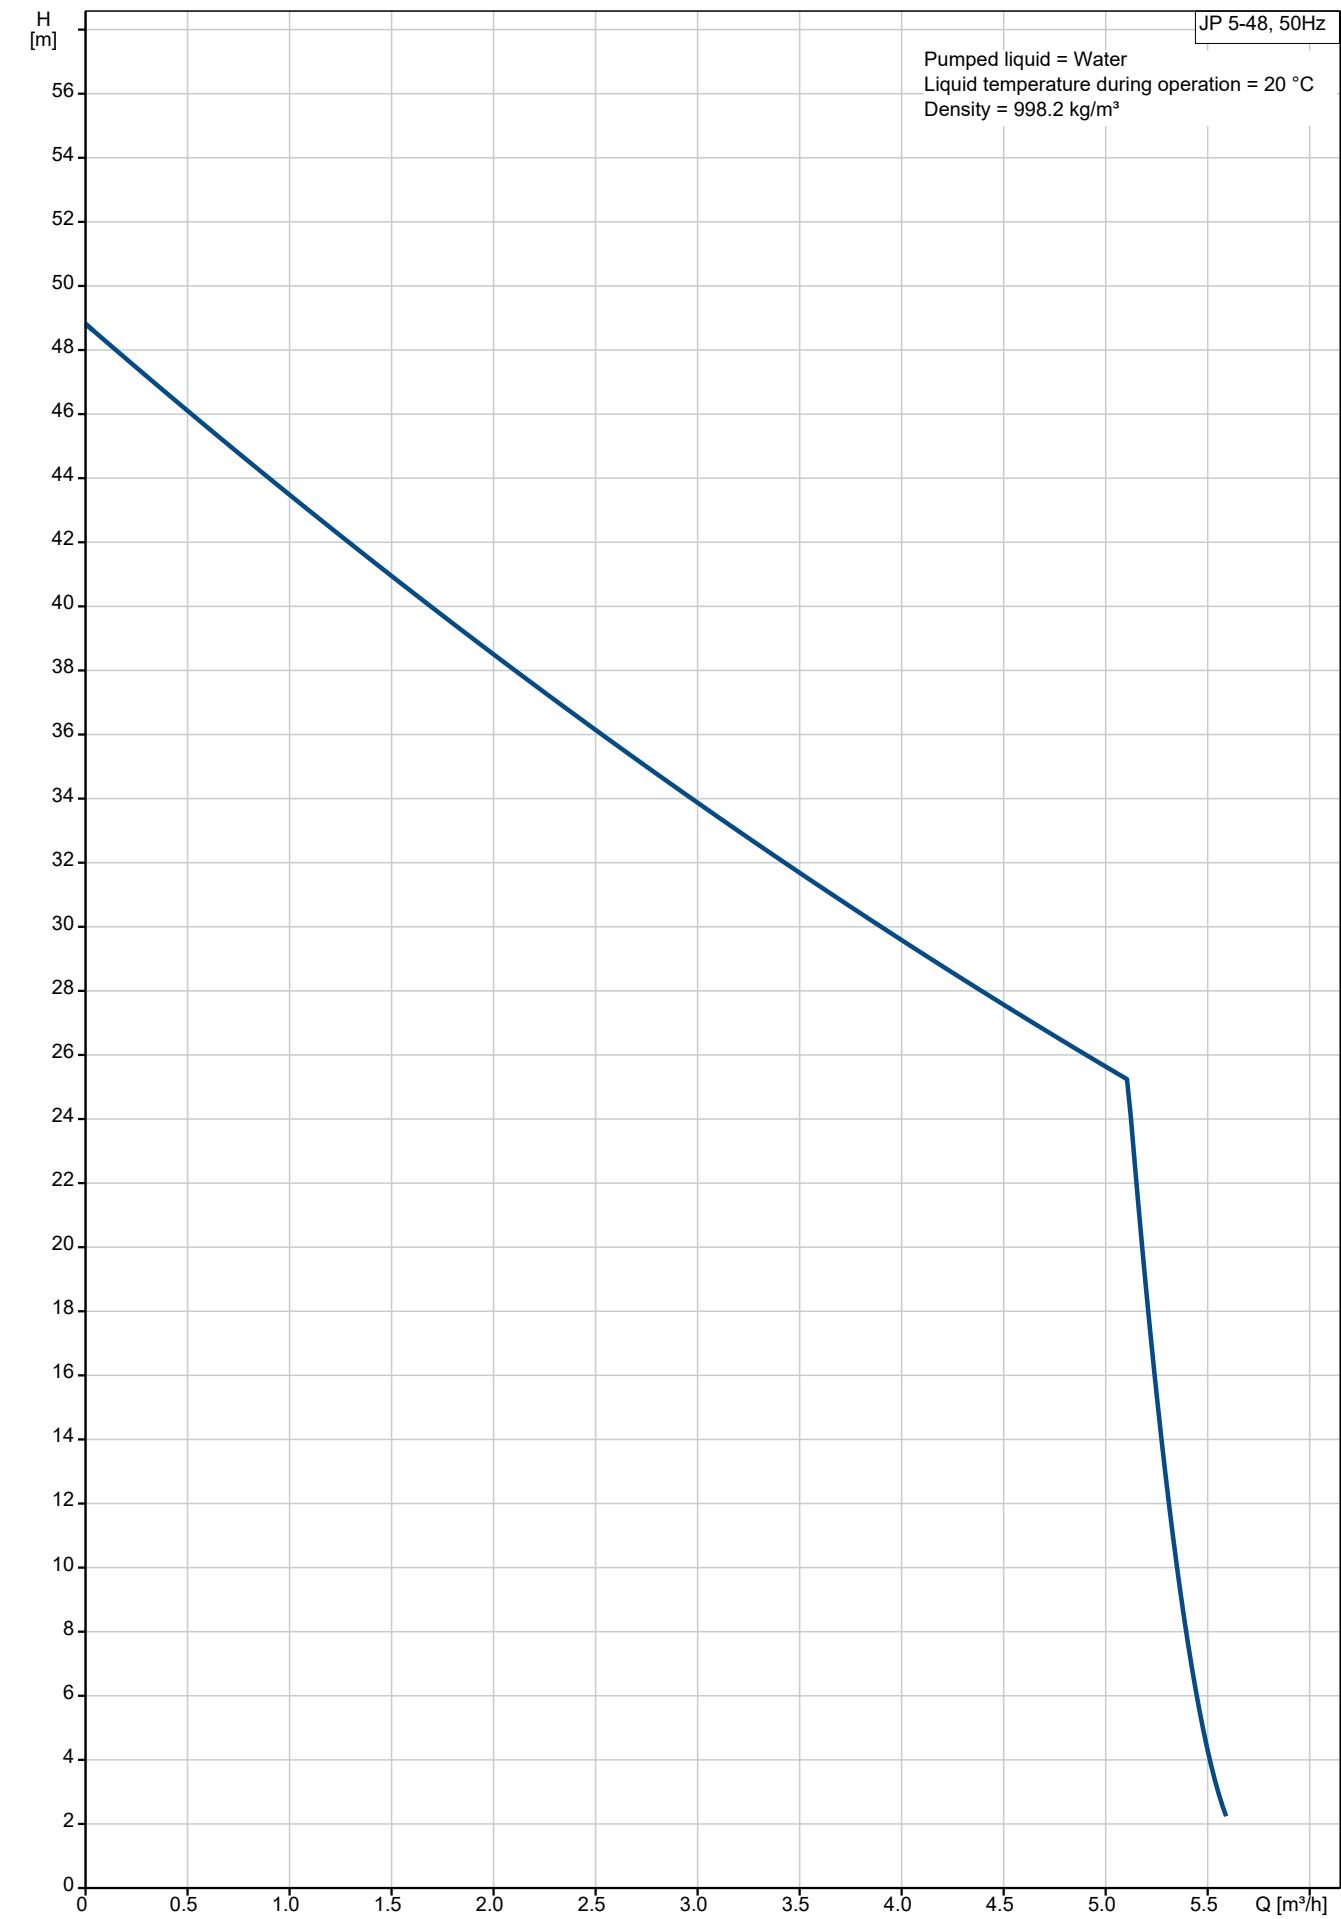



Qty.	Description																																												
1	<p>JP 5-48 S-BBVP</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 99458769</p> <p>Grundfos JP 5-48 S-BBVP is a self-priming single-stage centrifugal jet pump with axial inlet and radial outlet for easy adaption to local piping system. The JP pump is ideal for transferring water from wells or ground tanks in a large variety of installations and it has excellent suction capacity.</p> <p>The JP pump is designed for a long and trouble-free operation.</p> <p>The overall design is robust with excellent corrosion resistance ensured by the stainless steel pump housing, composite impeller and paint application by electrophoresis.</p> <p>JP is small and compact with a lifting handle that makes the pump handy and easy to carry.</p> <p>The compact pump features a build in ejector with guide vanes.</p> <p>This ensures optimum self-priming properties, featuring a suction-lift up to 8 meters.</p> <p>The self-priming pump also ensures a stable operation as it is able to lift liquid from below the inlet level and can handle a mix of air and liquid until the pump reaches a fully-primed pumping condition.</p> <p>The JP pump has built-in thermal protection, which immediately stops the pump if it overheats. The motor is air cooled and equipped with oversized, sealed, greased-for-life ball bearings to ensure silent operation and minimum service.</p> <p>Liquid:</p> <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>0 .. 40 °C</td></tr> <tr> <td>Selected liquid temperature:</td><td>20 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> <p>Technical:</p> <table> <tr> <td>Rated flow:</td><td>5 m³/h</td></tr> <tr> <td>Primary shaft seal:</td><td>BBVP</td></tr> <tr> <td>Approvals on nameplate:</td><td>CE,EAC</td></tr> <tr> <td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr> <tr> <td>Rated driver speed:</td><td>2800 rpm</td></tr> </table> <p>Materials:</p> <table> <tr> <td>Pump housing:</td><td>Stainless steel EN 1.4301 AISI 304</td></tr> <tr> <td>Impeller:</td><td>Composite</td></tr> </table> <p>Installation:</p> <table> <tr> <td>Range of ambient temperature:</td><td>0 .. 40 °C</td></tr> <tr> <td>Maximum operating pressure:</td><td>6 bar</td></tr> <tr> <td>Maximum permissible inlet pressure:</td><td>1 bar</td></tr> <tr> <td>Pump inlet:</td><td>G1</td></tr> <tr> <td>Pump outlet:</td><td>G1</td></tr> </table> <p>Electrical data:</p> <table> <tr> <td>Power input - P1:</td><td>1490 W</td></tr> <tr> <td>Rated power - P2:</td><td>1.014 kW</td></tr> <tr> <td>Mains frequency:</td><td>50 Hz</td></tr> <tr> <td>Rated voltage:</td><td>1 x 230 V</td></tr> <tr> <td>Rated current:</td><td>6.6 A</td></tr> <tr> <td>Starting current:</td><td>27.9 A</td></tr> </table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 40 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m ³	Rated flow:	5 m ³ /h	Primary shaft seal:	BBVP	Approvals on nameplate:	CE,EAC	Curve tolerance:	ISO9906:2012 3B	Rated driver speed:	2800 rpm	Pump housing:	Stainless steel EN 1.4301 AISI 304	Impeller:	Composite	Range of ambient temperature:	0 .. 40 °C	Maximum operating pressure:	6 bar	Maximum permissible inlet pressure:	1 bar	Pump inlet:	G1	Pump outlet:	G1	Power input - P1:	1490 W	Rated power - P2:	1.014 kW	Mains frequency:	50 Hz	Rated voltage:	1 x 230 V	Rated current:	6.6 A	Starting current:	27.9 A
Pumped liquid:	Water																																												
Liquid temperature range:	0 .. 40 °C																																												
Selected liquid temperature:	20 °C																																												
Density:	998.2 kg/m ³																																												
Rated flow:	5 m ³ /h																																												
Primary shaft seal:	BBVP																																												
Approvals on nameplate:	CE,EAC																																												
Curve tolerance:	ISO9906:2012 3B																																												
Rated driver speed:	2800 rpm																																												
Pump housing:	Stainless steel EN 1.4301 AISI 304																																												
Impeller:	Composite																																												
Range of ambient temperature:	0 .. 40 °C																																												
Maximum operating pressure:	6 bar																																												
Maximum permissible inlet pressure:	1 bar																																												
Pump inlet:	G1																																												
Pump outlet:	G1																																												
Power input - P1:	1490 W																																												
Rated power - P2:	1.014 kW																																												
Mains frequency:	50 Hz																																												
Rated voltage:	1 x 230 V																																												
Rated current:	6.6 A																																												
Starting current:	27.9 A																																												

Qty.	Description
	Capacitor size - run: 25 µF/450 V Enclosure class (IEC 34-5): IP44 Insulation class (IEC 85): F Type of cable plug: SCHUKO Others: Net weight: 12 kg Gross weight: 14 kg Shipping volume: 0.026 m³ Danish VVS No.: 385534050 Swedish RSK No.: 5928696 Finnish LVI No.: 4732538 Norwegian NRF no.: 9040047


99458769 JP 5-48 S-BBVP 50 Hz



Description	Value
General information:	
Product name:	JP 5-48 S-BBVP
Product No:	99458769
EAN number:	5713829460119
Price:	
Technical:	
Rated flow:	5 m³/h
Maximum head:	48.3 m
Head max:	48.3 m
Primary shaft seal:	BBVP
Approvals on nameplate:	CE,EAC
Curve tolerance:	ISO9906:2012 3B
Model:	A
Rated driver speed:	2800 rpm
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Composite
Material code:	S
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Maximum permissible inlet pressure:	1 bar
Pump inlet:	G1
Pump outlet:	G1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input - P1:	1490 W
Rated power - P2:	1.014 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	6.6 A
Starting current:	27.9 A
Capacitor size - run:	25 µF/450 V
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Type of cable plug:	SCHUKO
Cable:	Y
Controls:	
Presscontrol:	without press control
Switch:	on/off switch not included
Others:	
Net weight:	12 kg
Gross weight:	14 kg
Shipping volume:	0.026 m³
Danish VVS No.:	385534050
Swedish RSK No.:	5928696
Finnish LVI No.:	4732538
Norwegian NRF no.:	9040047

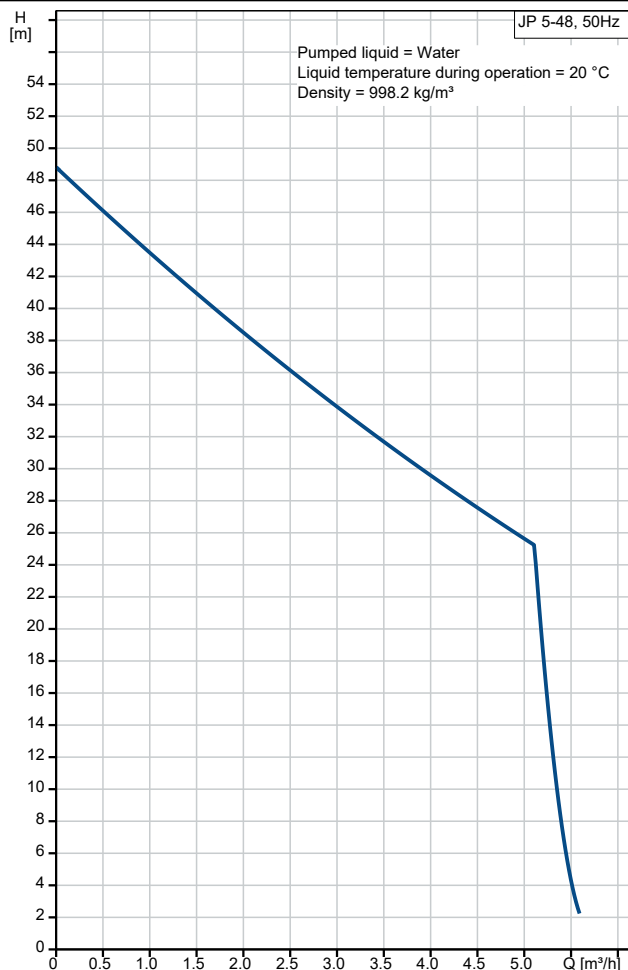

99458769 JP 5-48 S-BBVP 50 Hz

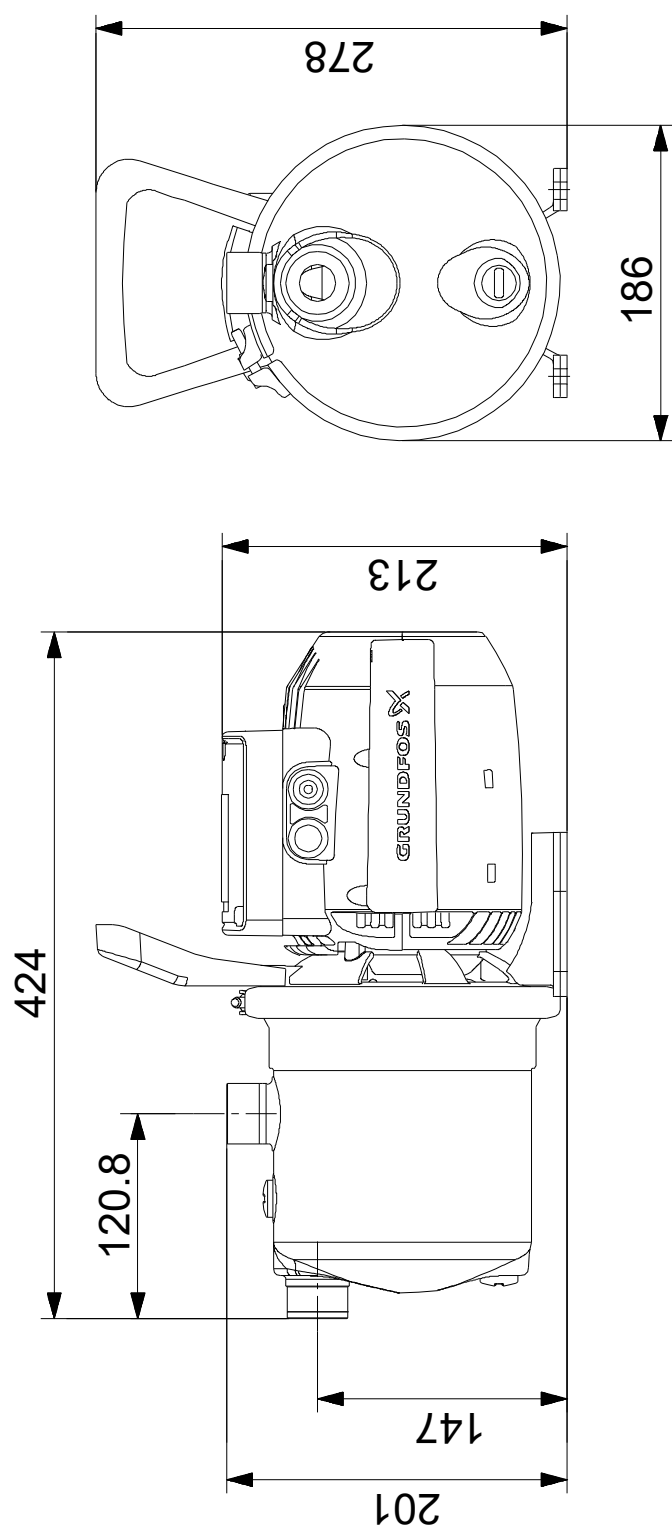

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.